

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/049942 A1

(51) International Patent Classification⁷: **E04H 9/02**

(21) International Application Number:
PCT/EP2004/012022

(22) International Filing Date: 25 October 2004 (25.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
VR2003A000126 30 October 2003 (30.10.2003) IT

(71) Applicant and

(72) Inventor: FERRARI, Marco [IT/TT]; Via Marsala, 61,
I-38100 Trento (IT).

(74) Agent: MODIANO, Guido; Modiano & Associati, Via
Meravigli, 16, I-20123 Milano (IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ISOLATOR/DISSIPATOR FOR INTERFACING BETWEEN THE GROUND AND SUPPORTING STRUCTURES

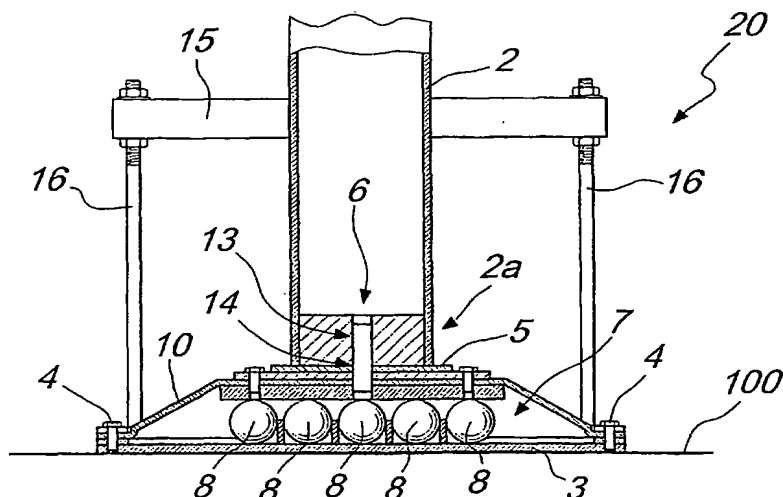

(57) Abstract: An isolator/dissipator for interfacing between the ground and supporting structures comprising a supporting base (3) that can be fixed to the ground (100) and supports a contact base (5) that can be associated, by way of kinematic connection means (6), with a lower portion of at least one supporting upright (2) of a supporting structure (2a); interface elements being provided between the contact base (5) and the supporting base (3) suitable to allow the contact base (5) to move with respect to the supporting base (3) at least along two directions that are parallel to the ground (100), the isolator/dissipator further having return elements (10), which act between the contact base (5) and the supporting base (3) and are adapted to control the relative movement between the supporting base (3) and the contact base (5).

8

Best Available Copy

WO 2005/049942 A1